



Ceramic Disc DC Capacitors Class 2, Low Loss 500 V, 1 kV, 2 kV and 3 kV

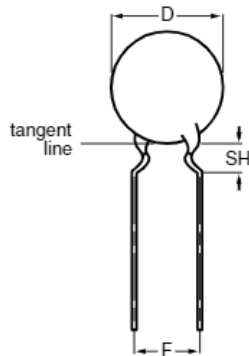

Capacitors with inside kink lead spacing

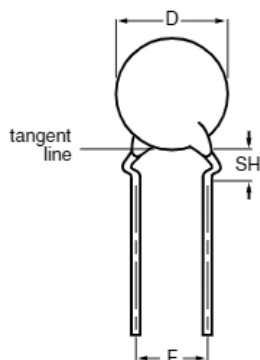

Capacitors with outside kink lead spacing

MARKING

Marking indicates capacitance value and tolerance in accordance with "EIA 198" and voltage marks.

EXAMPLES OF MARKING CODE

Disc size ($D_{max.}$) \leq 6.5 mm:

RR = Low loss with T.C.

Y5R

101 K

2 kV

Disc size ($D_{max.}$) \geq 7.5 mm:

BC

RR

102 K

3 kV

Note

The capacitors meet the essential requirements of "IEC 60384-9 and EIA 198". Unless stated otherwise all electrical values apply at an ambient temperature of 25 ± 3 °C, at normal atmospheric conditions

FEATURES

- High reliability
- Low losses
- High capacitance in small size
- Kinked leads
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

In electronic circuits where low losses and high capacitance per volume are essential, for example:

- SMPS
- HF ballast
- Snubber and high voltage circuits

DESIGN

The capacitors consist of a ceramic disc both sides of which are silver-plated. Connection leads are made of tinned copper having a diameter of 0.6 mm or 0.8 mm.

The capacitors are supplied with kinked leads and lead spacings of 5 mm or 7.5 mm and 10 mm. Encapsulation is made of epoxy-resin, flammable resistant in accordance with "UL94V-0".

CAPACITANCE RANGE

100 pF to 4700 pF

RATED DC VOLTAGE

500 V; 1 kV; 2 kV; 3 kV

DIELECTRIC STRENGTH

200 % of rated voltage

INSULATION RESISTANCE AT 500 V (DC)

\geq 10 000 M Ω min.

TOLERANCE ON CAPACITANCE

\pm 10 %; \pm 20 %

DISSIPATION FACTOR

0.2 % max.

OPERATING TEMPERATURE RANGE

- 30 °C to + 125 °C

TEMPERATURE COEFFICIENT Y5R (2C4) - 30 °C TO + 85 °C:


\pm 15 %

SECTIONAL SPECIFICATIONS


IEC 60384-9, EIA 198

AGING


Typical 0.5 % per time decade

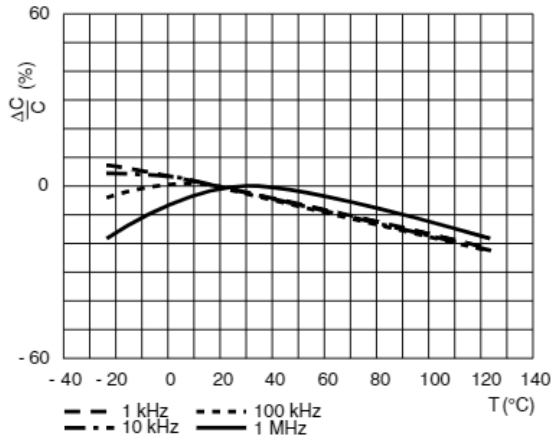

Typical capacitance change as a function of temperature and frequency

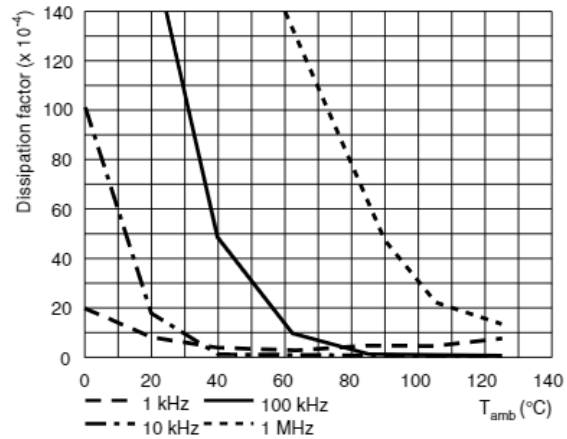

Typical dissipation factor as a function of temperature and frequency

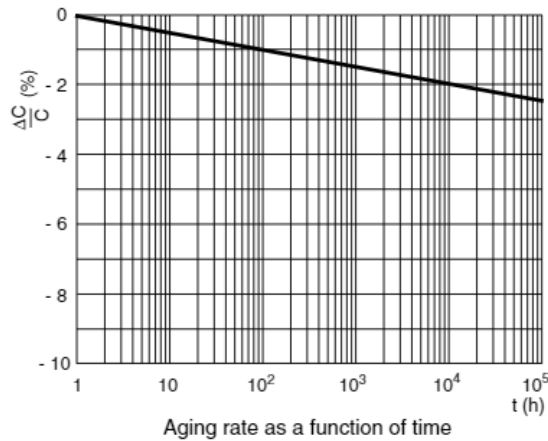

Aging rate as a function of time

ORDERING INFORMATION

C (pF)	TOL. (%)	D _{max.} (mm)	LEAD SPACING S (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE
					13 TH DIGIT: T = REEL; U = AMMO; 3 = BULK 16 TH DIGIT: R = RoHS COMPLIANT
500 V					
100	± 10	5.0	5.0	4.0	F101K20Y5RL6.J5.
120					F121K20Y5RL6.J5.
150					F151K20Y5RL6.J5.
180					F181K20Y5RL6.J5.
220					F221K20Y5RL6.J5.
270					F271K20Y5RL6.J5.
330					F331K20Y5RL6.J5.
390		F391K25Y5RL6.J5.			
470		F471K25Y5RL6.J5.			
560		F561K25Y5RL6.J5.			
680		F681K25Y5RL6.J5.			
820		F821K29Y5RL6.J5.			
1000		F102K29Y5RL6.J5.			
1200		F122K33Y5RL6.J5.			
1500		F152K33Y5RL6.J5.			
1800		F182K39Y5RL6.J5.			
2200		F222K39Y5RL6.J5.			
2700	F272K47Y5RL63J7.	7.5			



ORDERING INFORMATION					
C (pF)	TOL. (%)	D _{max.} (mm)	LEAD SPACING S (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE
					T = REEL; U = AMMO; 3 = BULK 16 TH DIGIT: R = RoHS COMPLIANT
1 kV					
100	± 10	6.5	5.0	4.0	F101K25Y5RN6.J5.
120					F121K25Y5RN6.J5.
150					F151K25Y5RN6.J5.
180					F181K25Y5RN6.J5.
220					F221K25Y5RN6.J5.
270					F271K29Y5RN6.J5.
330					F331K29Y5RN6.J5.
390					F391K29Y5RN6.J5.
470					F471K29Y5RN6.J5.
560					F561K33Y5RN6.J5.
680		F681K33Y5RN6.J5.			
820		F821K39Y5RN6.J5.			
1000		F102K39Y5RN6.J5.			
1200		F122K43Y5RN6.J5.			
1500		F152K43Y5RN6.J5.			
1800		F182K47Y5RN63J7.			
2200		F222K53Y5RN63J7.			
2700		F272K53Y5RN63J7.			
3300		F332K69Y5RN63J7.			
3900		F392K69Y5RN63J7.			
4700	F472K75Y5RN83J0.				
2 kV					
100	± 10	6.5	5.0	4.0	F101K25Y5RP6.K5.
120					F121K25Y5RP6.K5.
150					F151K25Y5RP6.K5.
180					F181K29Y5RP6.K5.
220					F221K29Y5RP6.K5.
270					F271K29Y5RP6.K5.
330					F331K29Y5RP6.K5.
390					F391K33Y5RP6.K5.
470					F471K33Y5RP6.K5.
560					F561K39Y5RP6.K5.
680		F681K39Y5RP6.K5.			
820		F821K43Y5RP6.K5.			
1000		F102K43Y5RP6.K5.			
1200		F122K47Y5RP63K7.			
1500		F152K53Y5RP63K7.			
1800		F182K53Y5RP63K7.			
2200		F222K69Y5RP63K7.			
2700		F272K75Y5RP83K0.			
3300		F332K75Y5RP83K0.			
3900		F392K75Y5RP83K0.			
4700	F472K96Y5RP83K0.				



ORDERING INFORMATION					
C (pF)	TOL. (%)	D _{max.} (mm)	LEAD SPACING S (mm)	SH ⁽²⁾ (mm)	CLEAR TEXT CODE
					13 TH DIGIT: T = REEL; U = AMMO; 3 = BULK 16 TH DIGIT: R = RoHS COMPLIANT
3 kV					
100	± 10	8.5	7.5	4.0	F101K33Y5RR6.K7.
120					F121K33Y5RR6.K7.
150					F151K33Y5RR6.K7.
180					F181K33Y5RR6.K7.
220					F221K33Y5RR6.K7.
270					F271K33Y5RR6.K7.
330					F331K33Y5RR6.K7.
390		F391K39Y5RR6.K7.			
470		F471K39Y5RR6.K7.			
560		F561K43Y5RR6.K7.			
680		F681K43Y5RR6.K7.			
820		F821K53Y5RR63K7.			
1000		F102K53Y5RR63K7.			
1200		F122K59Y5RR63K7.			
1500		F152K59Y5RR63K7.			
1800		F182K75Y5RR83K0.			
2200		F222K75Y5RR83K0.			
2700		F272K84Y5RR83K0.			

Notes

⁽¹⁾ Maximum thickness: 500 V = 3.5 mm; 1 kV = 4.5 mm; 2 kV = 5.0 mm; 3 kV = 6.0 mm.

⁽²⁾ SH = seated height.

PACKAGING					
PACKAGING TYPE	SIZE CODE	LEAD SPACE (mm)	VOLTAGE (VDC)	SPQ	BOX DIMENSIONS L x W x H (mm)
Bulk (long lead L ≥ 25.4 mm)	20 to 25	all	all	1000	245 x 120 x 65
	29 to 39			1000	
	43 to 47			1000	
	53 to 75			500	
	84 to 96			250	
Tape and reel	≤ 47	≤ 6.4	< 500	2500	370 x 370 x 60
			500 ≤ WV ≤ 2000	2000	
			3000	1000	
	≥ 7.5	all	1000		
≥ 53	all	all	1000		
Ammopack	≤ 47	≤ 6.4	< 500	2000	335 x 240 x 50
			500 ≤ WV < 2000	2000	335 x 290 x 50
			2000 and 3000	1500	360 x 330 x 55
	≥ 7.5	all	1500	360 x 330 x 55	
≥ 53	all	all	1500	335 x 290 x 50	

Note

• The capacitors are supplied in bulk packaging (cardboard boxes), in tape on reel or in ammpack